


# Hogedrukreiniger

Koudwater, mobiel - serie 3x3


KD623

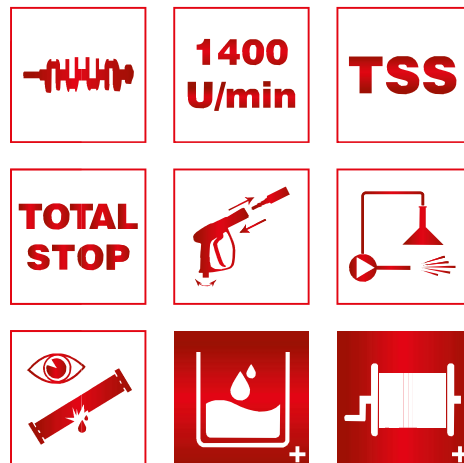

Type machine		KD623-Standaard	KD623-Premium
Spanning	1/ 230V/ 50Hz	<ul style="list-style-type: none"> <li>▶ 10m HD-slang DN06 - 250bar</li> <li>▶ Pistool met draaikoppeling</li> <li>▶ Lans 900mm met regelbare nozzle</li> <li>▶ Inox vlakstraal nozzle 25°</li> <li>▶ 15l tank voor detergent</li> <li>▶ Toevoer detergent met LD injector en dosering</li> </ul>	<ul style="list-style-type: none"> <li>▶ Slanghaspel</li> <li>▶ 15m HD-slang DN06 - 250bar</li> <li>▶ Pistool met draaikoppeling</li> <li>▶ Lans 900mm met nozzlebescherming</li> <li>▶ Inox vlakstraal nozzle 25°</li> <li>▶ Lans 900mm met vuilfrees</li> <li>▶ 17l watervoorraadtank</li> <li>▶ Scheiding met het waternet</li> <li>▶ Toevoer detergent in HD straal en dosering</li> </ul>
Werkdruk	30-160bar/ 3-16MPa		
Maximum druk	180bar/ 18MPa		
Debiet	300 - 600l/h		
Type nozzle	034		
Max. T° watertoevoer	45°C		
Toerental	1400 tpm		
Vermogen	2,9kW / 14,2A		
Electrische bescherming	16A		
Netto gewicht /met pallet en karton verpakking		46 kg / 66 kg	50 kg / 70 kg
Afmetingen toestel/ met verpakking (LxBxH)		805 x 485 x 950 mm / 790 x 595 x 810 mm	830 x 485 x 950 mm / 790 x 595 x 810 mm
<p>Robuust, rotatiegegoten, zelfdragend chassis, schokbestendige behuizing uit ABS, driefvoudige zuigerpomp met messing pompkop, hoogperformante keramische zuigers, inox kleppen, lekkage retour, start-stop systeem met vertraagde uitschakeling, totale uitschakeling na 20 min, drukregelaar voor traploos aanpasbare druk en debiet, 2 grote wielen en rubber stop voor alle terreinen, stockagemogelijkheid voor toebehoren, robuuste aan-uit draaiknop, 5m snoer met stekker, afneembare ergonomische duwbeugel.</p>			
Artikel-Nr.		558001	558002

# EHRLE attributes

## High pressure cleaner characteristics



### Triplex-Piston-Pump

Ceramic pump plunger, Stainless Steel pump valves and brass pump-head for long durability.



All EHRLE High-Pressure Cleaners are equipped with slow-running, air-cooled and 4-pole electric Motors.



### TSS-System with pump off delay

During breaks longer than 90 seconds, the unit switches automatically to stand-by position. After opening the trigger-gun again, the unit is immediately ready for operation. **The durability of the High-Pressure Pump is also higher.**



### Total Switch off after 20min

In case the Unit is not used in the stand-by mode for more than 20min it will switch off itself. The Unit can be re-started at the On/Off Switch for normal operation.



### High-Pressure Chemical with Dosing-Valve

Any cleaning-detergents can be applied during high-pressure stage by opening the Dosing-Valve. The High-Pressure Pump will absorb detergents together with water and pressurize it.



### Leakage Recognition

In the event of leaking parts in the High-Pressure Cleaner, or any Gun or Hose leaking, the Unit shuts itself down.



### Information on recommended daily time of use.



### Optical Flame-Monitor

on all High-Pressure Cleaners of Series ETRONIC II and static Units in order to comply with legal requirements.



### Water-Break Tank for Separation

No additional check unit Valve necessary – Machines conforms to Water-Board Regulations. 30% increased Cleaning-Power due to no Chemical-Injector. Water-Break Tank help to protects pump from water starvation.



### The quick-coupling system

by using the EHRLE QC315 quick-coupling system Accessories, Guns, Lances and Nozzles can be changed without the use of Tools. The EHRLE QC315 Guns incorporate an anti-twist Swivel for Hoses.



### Patent Wheel-Brake

(requirement by Law) with large rubber-wheels – no small castors.



### (Option)

### Water-Break Tank



### (Optional)

This professional **Hose-Reel** with stainless steel shaft is equipped with a folding handle doubling as a reel-brake. Up to 40m of High-Pressure Hose on the hose-reel ensure a wide action radius and easy storage.

### EHRLE horizontal-heatcoil

with 3-pass System. Highest Efficiency – with environmentally friendly low Emmissions! No additional insulation required – cold air is used to cool the Boiler. Separate Burner-Motor for professional use, ensures increased reliability.

