



High pressure cleaner

Cold water, motor pump unit - series MP


MP1140 - hot water resistant

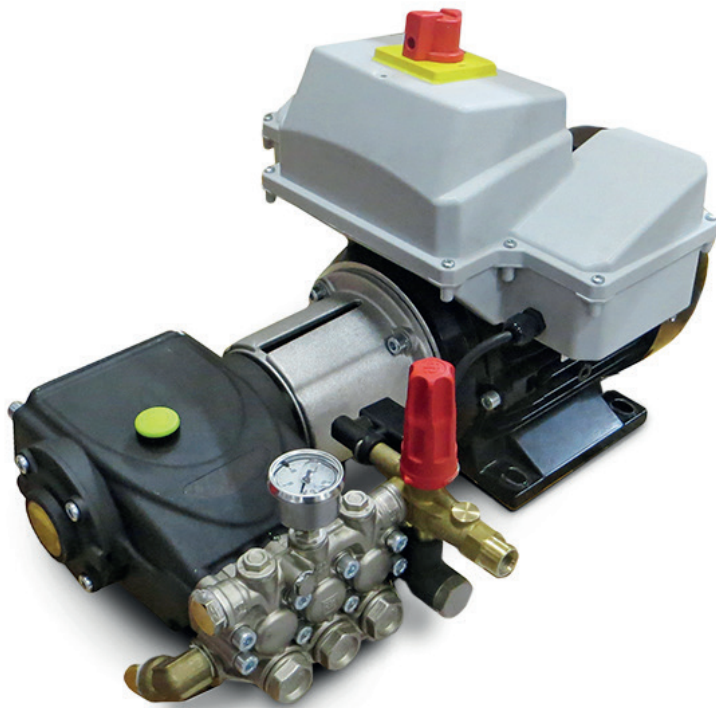

Type	MP1140		Wall mounting	Wall mounting STR
Voltage	3/400-415V/ 50Hz	▶ Delivery without Accessories	▶ Delivery without Accessories	▶ 20m HP-Hose DN08 - 315bar ▶ Hose reel
Operating pressure	30-180bar/ 3-18MPa			
Max. pressure	200bar/ 20MPa			
Discharge capacity	300 - 1000l/h			
Nozzle size	050			
Max. Inlet temperature	80°C			
Pump speed	1400rpm			
Connected load	6,5kW / 11,7A			
Electrical protection	3x16A slow-blowing			
Weight net / with package	54 kg / 63 kg	-	-	
Dimensions device / with package (LxWxH)	715x415x380 mm / 800x600x565 mm	-	-	
<p>Motor-pump unit for OEM-use, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, start-stop system with switch-off delay, total-switch-off after 20min with leakage-recognition, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, robust rotary on-off switch, 7,5m connection cable</p>				
Art. No.	234660	2980331	2980332	

EHRLE attributes

High pressure cleaner characteristics



Triplex-Piston-Pump
Ceramic pump plunger, Stainless Steel pump valves and brass pump-head for long durability.



All EHRLE High-Pressure Cleaners are equipped with slow-running, air-cooled and 4-pole electric Motors.



TSS-System with pump off delay
During breaks longer than 90 seconds, the unit switches automatically to stand-by position. After opening the trigger-gun again, the unit is immediately ready for operation. **The durability of the High-Pressure Pump is also higher.**



Total Switch off after 20min
In case the Unit is not used in the stand-by mode for more than 20min it will switch off itself. The Unit can be re-started at the On/Off Switch for normal operation.



High-Pressure Chemical with Dosing-Valve
Any cleaning-detergents can be applied during high-pressure stage by opening the Dosing-Valve. The High-Pressure Pump will absorb detergents together with water and pressurize it.



Leakage Recognition
In the event of leaking parts in the High-Pressure Cleaner, or any Gun or Hose leaking, the Unit shuts itself down.



Information on recommended daily time of use.



Optical Flame-Monitor
on all High-Pressure Cleaners of Series ETRONIC II and static Units in order to comply with legal requirements.



Water-Break Tank for Separation
No additional check unit Valve necessary – Machines conforms to Water-Board Regulations. 30% increased Cleaning-Power due to no Chemical-Injector. Water-Break Tank help to protects pump from water starvation.



The quick-coupling system
by using the EHRLE QC315 quick-coupling system Accessories, Guns, Lances and Nozzles can be changed without the use of Tools. The EHRLE QC315 Guns incorporate an anti-twist Swivel for Hoses.



Patent Wheel-Brake
(requirement by Law) with large rubber-wheels – no small castors.



(Option) Water-Break Tank



(Optional)
This professional **Hose-Reel** with stainless steel shaft is equipped with a folding handle doubling as a reel-brake. Up to 40m of High-Pressure Hose on the hose-reel ensure a wide action radius and easy storage.

EHRLE horizontal-heatcoil with 3-pass System. Highest Efficiency – with environmentally friendly low Emmissions! No additional insulation required – cold air is used to cool the Boiler. Separate Burner-Motor for professional use, ensures increased reliability.

